




## NTF – NON TEXTILE FLOOR

„wulfmeyer  
process“

The Wulfmeyer processed NTF consists of (top down)

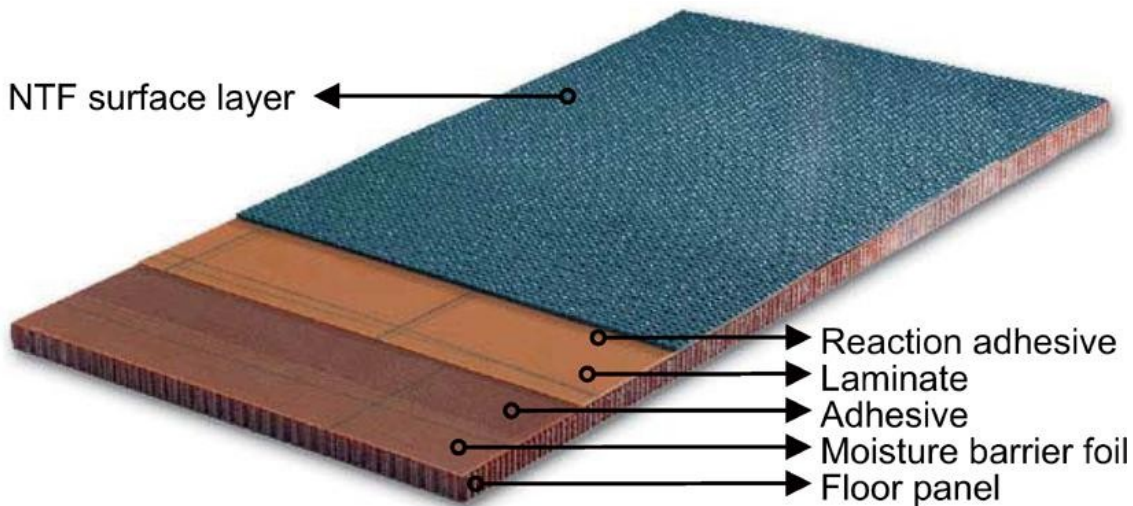

### The Wulfmeyer Process

The surface layer and a reinforcing backing (GFRP laminate) are bonded intimately together under specific temperature and pressure. This method alleviates the potential for NTF waving, bubbling, telegraphing, shrinkage and provides an impact protection which reduces the risk of corrosion to the floor structure.

